



REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	ZQJ 11/18//2014	~	ZQJ 11/18//2014
B	ADD P/N CODE	CJJ 11/18//2014	~	

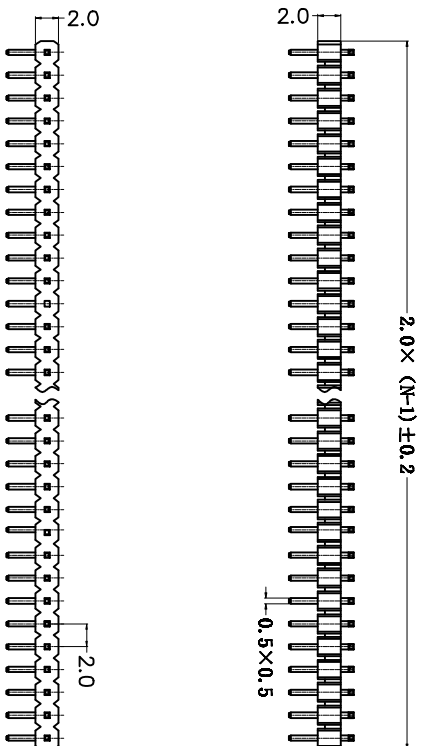

材质:
触点材料: 铜合金
触点镀层: 先镀镍, 再镀金或锡
绝缘件: 填充的聚酯 (UL94V-0)
(耐火等级UL94V-0)
技术规格:
额定电流: 3Ampere
绝缘电阻: 5.000MΩ
介质耐电压: 500VAC
接触电阻: 20mΩ
使用温度: -55' C——105' C

GENERAL TOLERANCE	ANGLE TOLERANCE
X, ±0.60	X, ±5°
.X, ±0.38	.X, ±3°
.XX, ±0.25	.XX, ±2°

PROJECTION	TITLE
UNITS mm	2.0MM 1*40PIN HEADER RA
SHEET SIZE A4	SERIES LL1011-3

ITEM	PART NAME	PART NO.	COPPER ALLOY	GOLD OR TIN PLATED	DRAWING TYPE	CUSTOMER
2	CONTACT				SCALE	1:1
1	HOUSING		THERMOPLASTIC	UL 94 V-0	DRAWING NO.	SHEET 1 OF 1
1	PART NAME	2	MATERILAS	FINISHED		

慈溪蓝翎电子有限公司
 CIXI LANLING ELECTRONICS CO., LTD.