
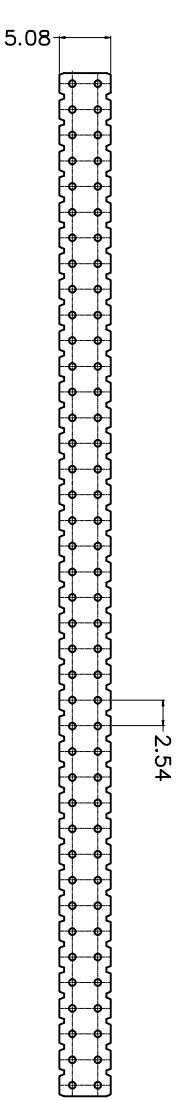


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	ZQJ 11/18/2014	~	ZQJ 11/18/2014
B	ADD P/N CODE	CJJ 11/18/2014	~	

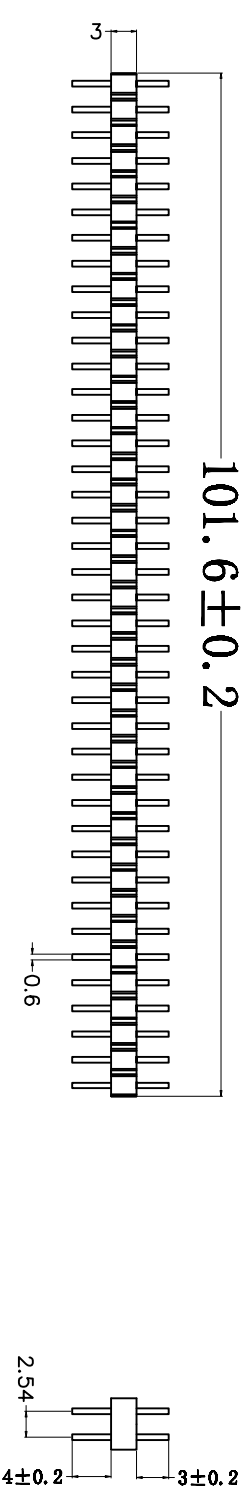

- NOTES:
- ELECTRICAL CHARACTERISTICS:
 - CONTACT RESISTANCE: 20mΩ Max.
 - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC(rms) FOR 1 MINUTE.
 - INSULATION RESISTANCE: 1000MΩ Min.
 - ENVIRONMENT CHARACTERISTICS:
 - TEMPERATURE: -40°C~+105°C.

ITEM	PART NAME	PART NO.	MATERIALS	FINISHED	DRAWING NO.	SCALE	CUSTOMER	SHEET	1 OF 1
2	CONTACT		COPPER ALLOY						
1	HOUSING		THERMOPLASTIC						
					UL 94 V-0				

GENERAL TOLERANCE		ANGLE TOLERANCE	
X	±0.60	X	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°

PROJECTION	UNITS	TITLE
	mm	2.54MM ROUND PIN HEADER

SHEET SIZE	A4	SERIES	LL1009-2B

慈溪蓝翎电子有限公司
 CIXI LANLING ELECTRONICS CO., LTD.