



REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	ZQJ 11/18/2014	~	ZQJ 11/18/2014
B	ADD P/N 0008	CJJ 11/18/2014	~	

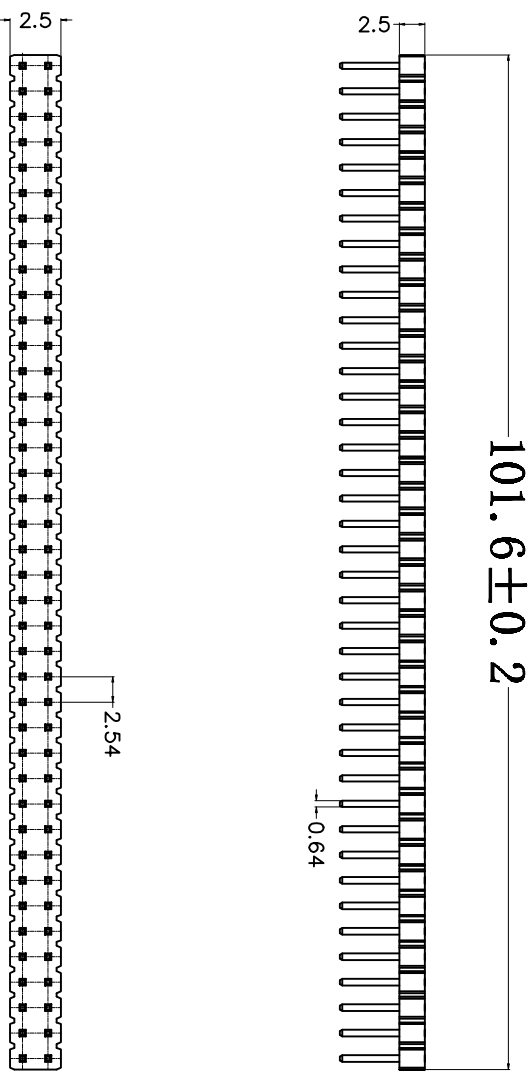

NOTES:

- ELECTRICAL CHARACTERISTICS:
 - CONTACT RESISTANCE: $20m\Omega$ Max.
 - DIELECTRIC WITHSTANDING VOLTAGE: $500V$ AC(rms) FOR 1 MINUTE.
 - INSULATION RESISTANCE: $1000M\Omega$ Min.
- ENVIRONMENT CHARACTERISTICS:
 - TEMPERATURE: $-40^{\circ}C \sim +105^{\circ}C$.

GENERAL TOLERANCE	ANGLE TOLERANCE
X, ± 0.60	X, $\pm 5^{\circ}$
.X, ± 0.38	.X, $\pm 3^{\circ}$
.XX, ± 0.25	.XX, $\pm 2^{\circ}$

PROJECTION UNITS	TITLE
SHEET SIZE	2.54MM PIN HEADER
A4	
SERIES	LL1009-2C

ITEM	PART NAME	PART NO.	MATERIALS	FINISHED	DRAWING NO.
2	CONTACT		COPPER ALLOY	GOLD OR TIN PLATED	
1	HOUSING		THERMOPLASTIC	UL 94 V-0	

DRAWING TYPE	CUSTOMER	SHEET	1 OF 1
SCALE	1:1		
DRAWING NO.			


慈溪蓝翎电子有限公司
 CIXI LANLING ELECTRONICS CO., LTD.