


| REV. | DESCRIPTION  | DRAWN          | CHECKED | APPROVED       |
|------|--------------|----------------|---------|----------------|
| A    | NEW RELEASE  | ZQJ 11/18/2014 | ~       | ZQJ 11/18/2014 |
| B    | ADD P/N CODE | CJJ 11/18/2014 | ~       |                |

SINGLE ROW  
 N:NUMBER OF CONTACTS  
 A/B:CUSTOMER LENGTH AVAILABLE

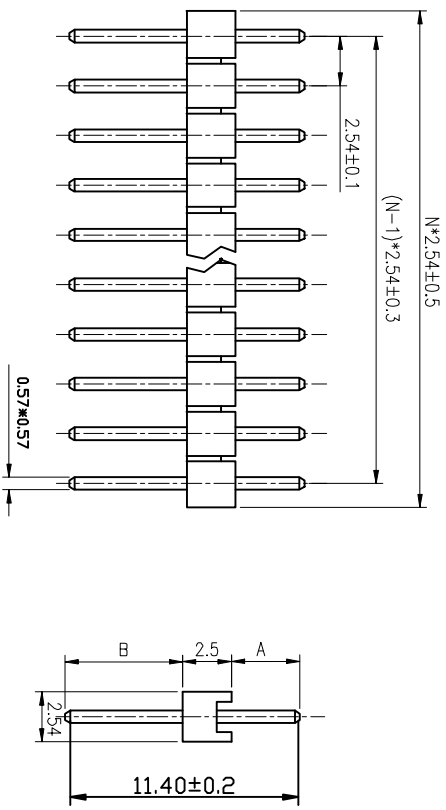

- NOTES:
- ELECTRICAL CHARACTERISTICS:
    - CONTACT RESISTANCE: 20mΩ Max.
    - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC(rms) FOR 1 MINUTE.
    - INSULATION RESISTANCE: 1000MΩ Min.
  - ENVIRONMENT CHARACTERISTICS:
    - TEMPERATURE: -40°C~+105°C.

| ITEM | PART NAME | PART NO. | MATERIALS     | FINISHED | DRAWING NO.        | SCALE | CUSTOMER | SHEET | 1 OF 1 |
|------|-----------|----------|---------------|----------|--------------------|-------|----------|-------|--------|
| 2    | CONTACT   |          | COPPER ALLOY  |          | GOLD OR TIN PLATED |       |          |       |        |
| 1    | HOUSING   |          | THERMOPLASTIC |          | UL 94 V-0          |       |          |       |        |
| 1    | PART NAME |          | MATERIALS     |          | FINISHED           |       |          |       |        |

| GENERAL TOLERANCE | ANGLE TOLERANCE |
|-------------------|-----------------|
| X ±0.60           | X ±5°           |
| .X ±0.38          | .X ±3°          |
| .XX ±0.25         | .XX ±2°         |

| PROJECTION | UNITS  | TITLE                          |
|------------|--------|--------------------------------|
| mm         | A4     | 2.54mm 1400Pin Header S/T Type |
| SHEET SIZE | SERIES | 0.57x0.57mm Square pin         |
|            |        | LL1009-1F                      |

慈溪蓝翎电子有限公司  
 CIXI LANLING ELECTRONICS CO., LTD.

1 2 3 4 5 6 7 8