



REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	ZQJ 11/18/2014	~	ZQJ 11/18/2014
B	ADD P/N CODE	CJJ 11/18/2014	~	

NOTES:

- ELECTRICAL CHARACTERISTICS:
  - CONTACT RESISTANCE: 20mΩ Max. INITIAL.
  - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC(rms) FOR 1 MINUTE.
  - INSULATION RESISTANCE: 1000MΩ Min.
- ENVIRONMENT CHARACTERISTICS:
  - TEMPERATURE: -40°C~+105°C.

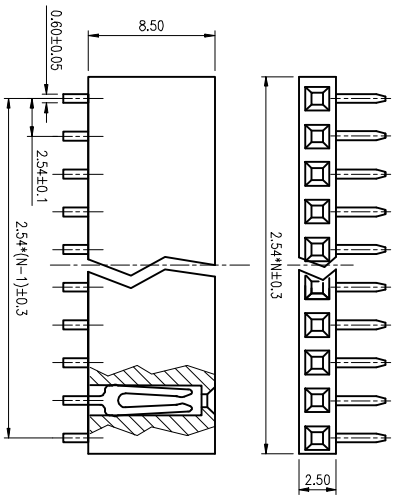

SINGLE ROW  
N:NUMBER OF CONTACTS

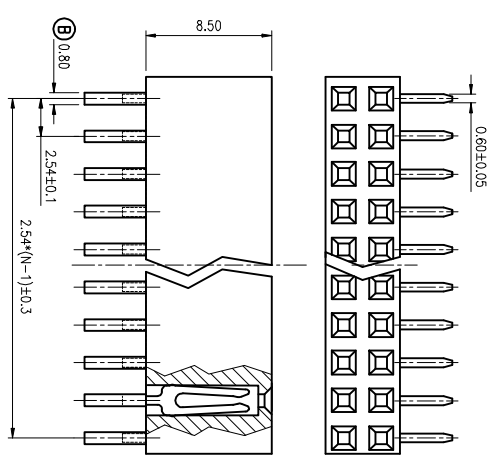

DUAL ROWS  
N:NUMBER OF CONTACTS/2

GENERAL TOLERANCE		ANGLE TOLERANCE	
X, ±0.60	X, ±5°	X, ±5°	X, ±5°
.X, ±0.38	X, ±3°	.X, ±3°	.X, ±3°
.XX, ±0.25	.XX, ±2°	.XX, ±2°	.XX, ±2°

DRAWING TYPE	CUSTOMER
SCALE	1:1
DRAWING NO.	SHEET 1 OF 1

PROJECTION	TITLE	TYPE
UNITS mm	FEMALE HEADER PITCH 2.54MM R/A	
SHEET SIZE A4	SERIES LL1015-1A/1B	

慈溪蓝翎电子有限公司  
CIXI LANLING ELECTRONICS CO., LTD.

