


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	ZQJ 11/18/2014	~	ZQJ 11/18/2014
B	ADD P/N CODE	CJJ 11/18/2014	~	

SPECIFICATIONS

Current Rating: 2amps
 Insulator Resistance: 500Megaohms min.
 Dielectric Withstanding: AC 500V
 Operating Temperature: -40° ~ +105 ° C
 Contact Material: Phosphor bronze
 Insulator Material: PA66
 Plating: Gold Flash
 UNSPECIFIED TOLERANCES: ±0.20

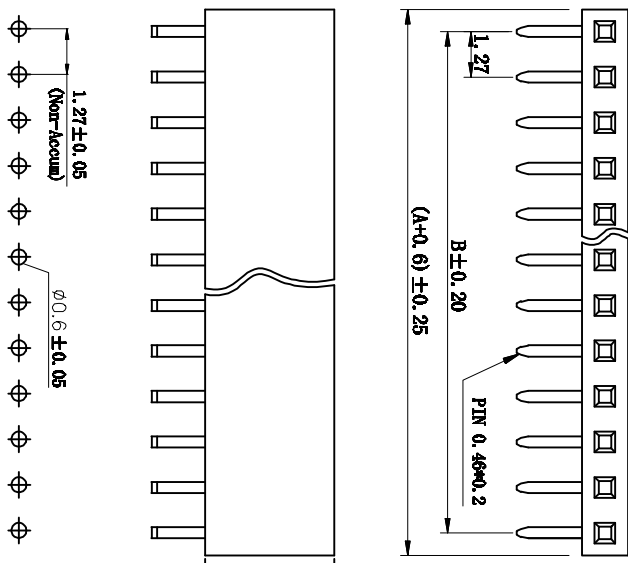

GENERAL TOLERANCE		ANGLE TOLERANCE	
X, ±0.60	X, ±5°	X, ±3°	±2°
.X, ±0.38	.X, ±3°	.XX, ±2°	
.XX, ±0.25	.XX, ±2°		
DRAWING TYPE		CUSTOMER	
SCALE		1:1	
DRAWING NO.		SHEET 1 OF 1	

PROJECTION	TITLE
UNITS	mm
SHEET SIZE	A4
SERIES	LL1018-3A

Female Header PHLL 27x4.3 16P 90° 2#

慈溪蓝翎电子有限公司
 CIXI LANLING ELECTRONICS CO., LTD.

