
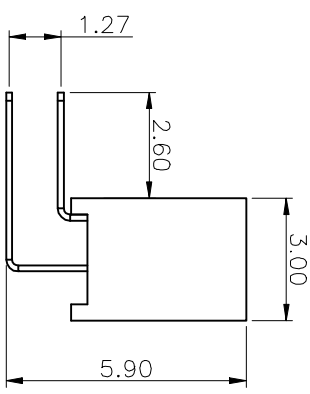
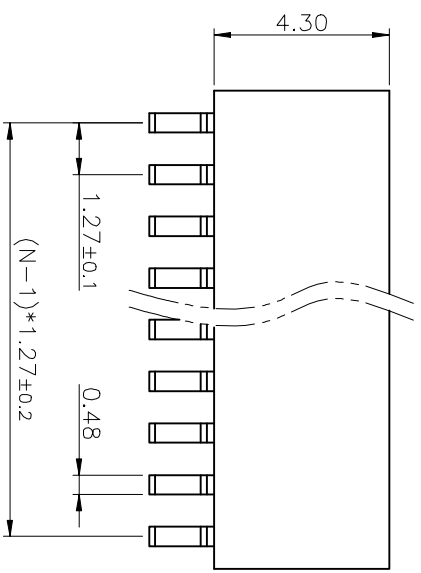


N=No. of contacts/2

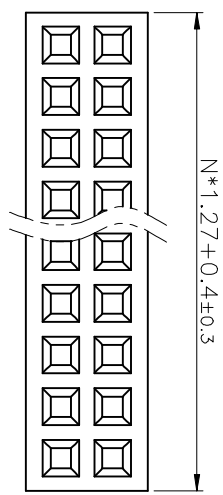

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	ZQJ 11/18/2014	~	ZQJ 11/18/2014
B	ADD P/N CODE	CJJ 11/18/2014	~	

NOTES:

- SPECIFICATIONS
 - Current Rating: 1A
 - Insulation Resistance: 500MΩ Min
 - Dielectric Withstanding: 300V AC
 - Contact Resistance: 30mΩ Max
 - Operating Temperature: -40°C to +105°C
- MATERIALS
 - Contact Material: Copper alloy
 - Insulator: Thermoplastic(UL94 V-0)

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION	TITLE
X.	±0.60	X.	±5°	mm	FEMALE HEADER PITCH 1.27mm
X	±0.38	X	±3'		R/A TYPE
.XX	±0.25	.XX	±2'		
DRAWING TYPE CUSTOMER		SHEET 1 OF 1		SHEET SIZE	SERIES LL1018-3B
SCALE 1:1					
DRAWING NO.					

慈溪蓝翎电子有限公司
CIXI LANLING ELECTRONICS CO., LTD.

