





REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	ZQJ 11/18/2014	~	ZQJ 11/18/2014
B	ADD P/N CODE	CJJ 11/18/2014	~	

SPECIFICATIONS

Current Rating: Lamps
 Insulator resistance: 1000Megohms min.
 Dielectric Withstanding: AC 300V
 Operating Temperature: -40° to +105° C
 Contact Material: Phosphor Bronzes
 Insulator Material: PA46
 Plating: Gold Flash
 Unspecified tolerance: ±0.20

Dimensions List

Contacts Per row	Dimensions		Contacts Per row	Dimensions	
	A	B		A	B
1	1.27	0	21	26.67	25.40
2	2.54	1.27	22	27.94	26.67
3	3.81	2.54	23	29.21	27.94
4	5.08	3.81	24	30.48	29.21
5	6.35	5.08	25	31.75	30.48
6	7.62	6.35	26	33.02	31.75
7	8.89	7.62	27	34.29	33.02
8	10.16	8.89	28	35.56	34.29
9	11.43	10.16	29	36.83	35.56
10	12.70	11.43	30	38.10	36.83
11	13.97	12.70	31	39.37	38.10
12	15.24	13.97	32	40.64	39.37
13	16.51	15.24	33	41.91	40.64
14	17.78	16.51	34	43.18	41.91
15	19.05	17.78	35	44.45	43.18
16	20.32	19.05	36	45.72	44.45
17	21.59	20.32	37	46.99	45.72
18	22.86	21.59	38	48.26	46.99
19	24.13	22.86	39	49.53	48.26
20	25.40	24.13	40	50.80	49.53

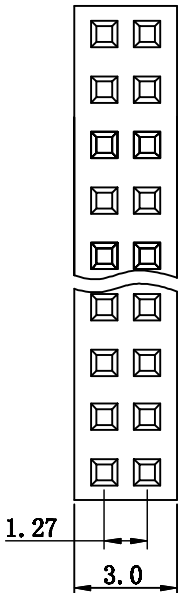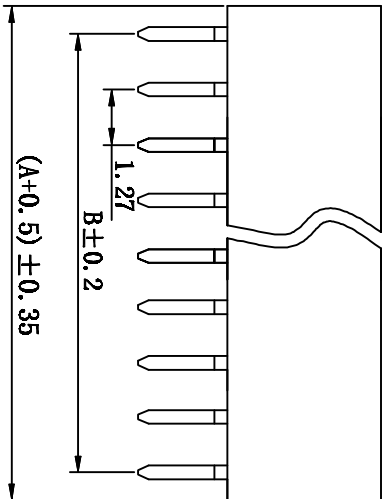

ITEM	PART NAME	PART NO.	MATERIALS	FINISHED	DRAWING NO.	SHEET	1 OF 1
2	CONTACT		COPPER ALLOY	GOLD OR TIN PLATED			
1	HOUSING		THERMOPLASTIC	UL 94 V-0			

GENERAL TOLERANCE	ANGLE TOLERANCE	PROJECTION
X ±0.60	X ±5°	UNITS
.X ±0.38	.X ±3°	SHEET SIZE
.XX ±0.25	.XX ±2°	A4

TITLE	SERIES
1.27MM 2*40Pin Female Header	LL1018-2A



慈溪蓝翎电子有限公司
 CIXI LANLING ELECTRONICS CO., LTD.