




REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	ZQJ 11/18/2014	~	ZQJ 11/18/2014
B		CJJ 11/18/2014	~	ZQJ 11/18/2014
C		CJJ 11/18/2014	~	

NOTES:


- ELECTRICAL CHARACTERISTICS:
 - CONTACT RESISTANCE: 20mΩ Max. INITIAL.
 - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC(rms) FOR 1 MINUTE.
 - INSULATION RESISTANCE: 1000MΩ Min.
- ENVIRONMENT CHARACTERISTICS:
 - TEMPERATURE RANGE: -40°C~+105°C.
- PRODUCT NUMBER CODE:

LL1007 - X X X X X X X - X - X


 - HOUSING MATERIAL
 - 0: PBT UL94 V-0
 - 2: PBT UL94 HB
 - 4: PA-46

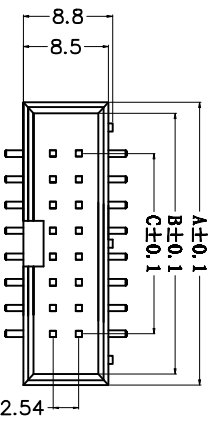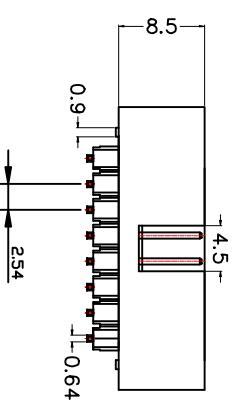

Position	A	B	C
6P	15.2	13	5.08
8P	17.6	15.4	7.62
10P	20.3	18.1	10.16
12P	22.8	20.6	12.7
14P	25.3	23.1	15.24
16P	27.9	25.7	17.78
18P	30.5	28.3	20.32
20P	33	30.8	22.86
24P	38	35.8	27.94
26P	40.6	38.4	30.48
30P	45.6	43.4	35.56
34P	50.7	48.5	40.64
40P	58.4	56.2	48.26
50P	71	68.8	60.96
60P	84.1	81.9	73.66
64P	89.2	87	78.74

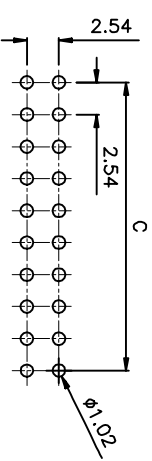

RECOMMEND PCB LAYOUT(TOLERANCE=±0.05)

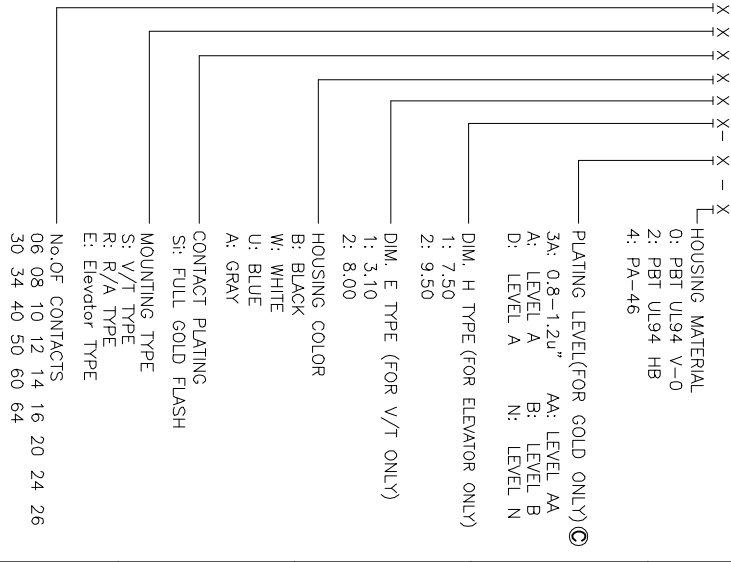

GENERAL TOLERANCE	ANGLE TOLERANCE
X. ±0.60	X. ±5°
.X ±0.38	.X ±3°
.XX ±0.25	.XX ±2°

DRAWING TYPE	CUSTOMER
SCALE	1:1
DRAWING NO.	SHEET 1 OF 1

PROJECTION	TITLE
UNITS	BOX HEADER ELEVATED S.M.T
SHEET SIZE	PITCH 2.54mm
A4	LL1007-5

慈溪蓝翎电子有限公司
 CIXI LANLING ELECTRONICS CO., LTD.
 Tel: 86-574-63519095 Fax: 86-574-63517070