

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	CJJ 11/18/2014		CJJ 11/18/2014
B	ADD P/N CODE	CJJ 11/18/2014		

NOTES:

1. MATERIAL

- 1.1 INSULATOR: THERMOPLASTIC(UL 94V-0).
- 1.2 CONTACT: COPPER ALLOY.



2. SPECIFICATION

- 2.1 TEMPERATURE: -40°C~+105°C.
- 2.2 CONTACT RESISTANCE: 20mΩ max.(initial).
- 2.3 INSULATION RESISTANCE: 1000MΩ min.
- 2.4 DIELECTRIC WITHSTANDING VOLTAGE: AC 500V PER MINUTE.

3. PRODUCT NUMBER CODE:

LL1008- X X X X - X

- ⑧ PLATING LEVEL(FOR GOLD ONLY)
- 3A: 0.8-1.2u" AA: LEVEL AA
- A: LEVEL A B: LEVEL B
- HOUSING COLOR
- B: BLACK
- W: WHITE
- L: BLUE
- A: GRAY
- CONTACT PLATING
- F1: FULL GOLD FLASH
- MOUNTING TYPE
- S: V/T TYPE
- R: R/A TYPE
- E: Elevator TYPE
- No.OF CONTACTS
- 08 10 12 14 16 20 26
- 30 34 40 50 60 64

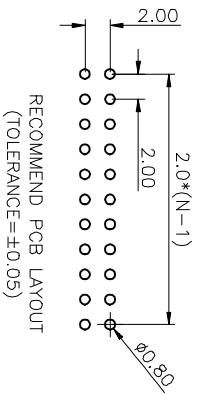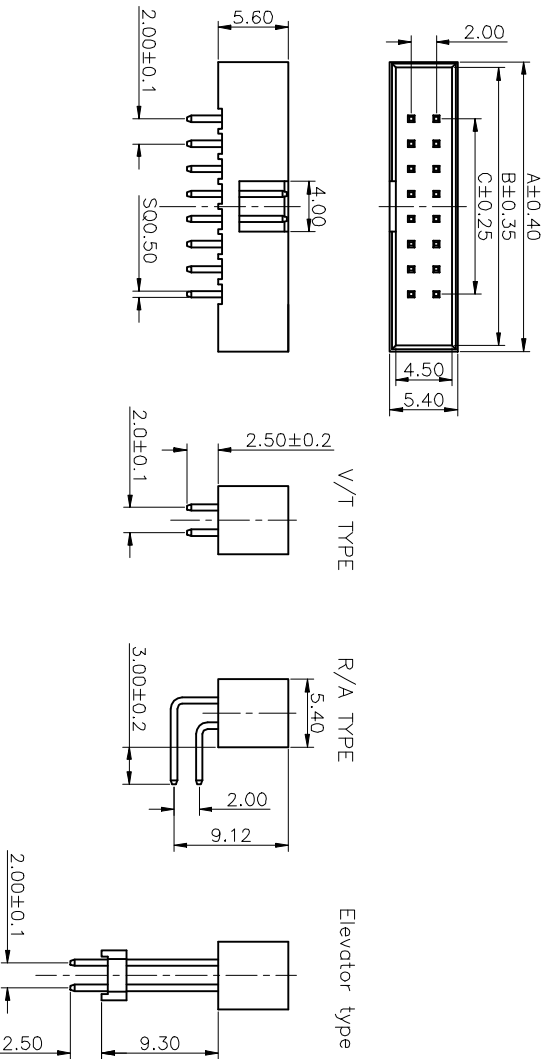

GENERAL TOLERANCE	ANGLE TOLERANCE	PROJECTION	TITLE
X: ±0.60	X: ±5°	UNITS	20mm BOX HEADER
.X: ±0.38	X: ±3°	SHEET SIZE	S/T, R/A/ELEVATOR TYPE
.XX: ±0.25	.XX: ±2°	A4	LL1008-1A/1B/1D
DRAWING TYPE: CUSTOMER		SERIES	
SCALE: 1:1	SHEET: 1 OF 1		
DRAWING NO.			



慈溪蓝翎电子有限公司
CIXI LANLING ELECTRONICS CO., LTD.
 Tel: 86-574-63519036 Fax: 86-574-63517070