


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	ZQJ 11/18/2014	~	
B	ADD DIM	CJJ 11/18/2014	~	
C		CJJ 11/18/2014	~	
D		CJJ 11/18/2014	~	
E		CJJ 11/18/2014	~	




NOTES:

- ELECTRICAL CHARACTERISTICS:
 - CONTACT RESISTANCE: 20mΩ Max. INITIAL
 - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC(rms) FOR 1 MINUTE.
 - INSULATION RESISTANCE: 1000MΩ Min.
- ENVIRONMENT CHARACTERISTICS:
 - TEMPERATURE: -40°C~+105°C.
- PRODUCT NUMBER CODE:

LL1030-1- X X X X X X X X - X

PLATING LEVEL(FOR GOLD ONLY) ⑤
 3A: 0.8-1.2u" AA: LEVEL AA
 A: LEVEL A B: LEVEL B
 D: LEVEL A N: LEVEL N

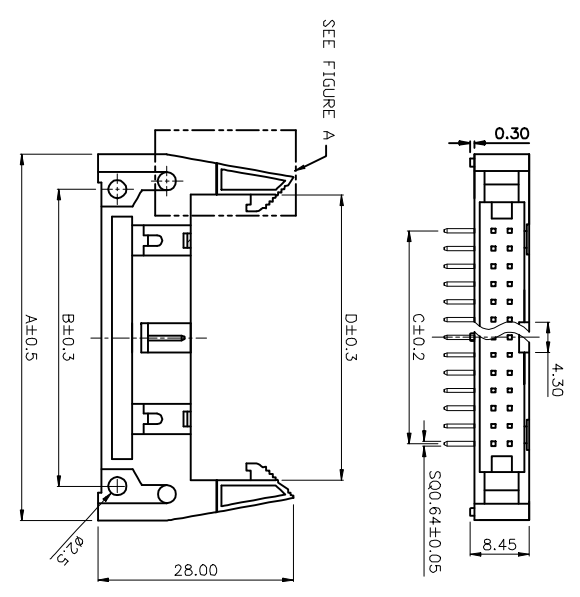

R/A TYPE


V/T TYPE

R/A TYPE		V/T TYPE	
Latch Type	DIM	Latch Type	DIM
Standard Latch	3.70	Standard Latch	3.10
		Standard Latch	8.10

AVAILABLE DIMENSION TABLE

No. of Contacts	10	14	16	20	26	30	34	40	50	60	64
A	32.1	37.18	39.72	44.80	52.42	57.50	62.58	70.20	82.90	95.60	100.68
B	22.20	27.28	29.82	34.90	42.52	47.60	52.68	60.30	73.00	85.70	90.78
C	10.16	15.24	17.78	22.86	30.48	35.56	40.64	48.26	60.96	73.66	78.74
D	18.10	23.18	25.72	30.80	38.42	43.50	48.58	56.20	68.90	81.60	86.68

- LOCK DIM
- 7: 7.90mm(standard)
- 4: 4.50mm(spec'd)
- HOUSING COLOR B:BLACK
- CONTACT PLATING Sr: Full gold finish
- HOUSING TYPE B: BIG LATCH HOUSING
- MOUNTING TYPE S: STRAIGHT
- R: R/A
- No. OF CONTACTS: 10 14 16 20 26 30 34 40 50 60 64

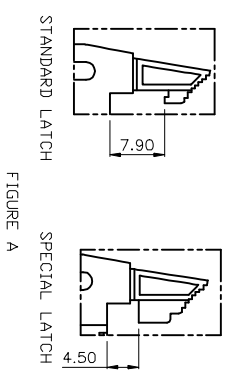

GENERAL TOLERANCE		ANGLE TOLERANCE		TOLERANCE	
UNITS	PROJECTION	UNITS	PROJECTION	UNITS	PROJECTION
X	± 0.60	X	$\pm 5^\circ$	X	± 0.38
.X	± 0.38	X	$\pm 3^\circ$.X	± 0.25
.XX	± 0.25	.XX	$\pm 2^\circ$		

DRAWING TYPE		CUSTOMER		SCALE	
DRAWING NO.	1:1	SHEET	1 OF 1	SCALE	1:1

慈溪蓝翎电子有限公司
CIXI LANLING ELECTRONICS CO., LTD.