

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	CJJ 11/18/2014	~	ZQJ 11/18/2014
B		CJJ 11/18/2014		

NOTES:




1.SPECIFICATION

- Temperature range:-40~105°C
- Contact Resistance:20mΩ max.
- Insulation Resistance:1,000MΩ min
- Dielectric Withstanding Voltage:  
AC 500V Per Minute


2.PRODUCT NUMBER CODE:

LL1030-2B- X X X X

- Housing Color  
B: Black  
L: Blue
- Contact Plating  
B: All Gold Flash
- Mounting Type  
R: R/A  
V: V/T
- No.of Contacts  
10 14 16 20  
26 30 34 40  
50 60 64
- Series No  
LL1030-2B

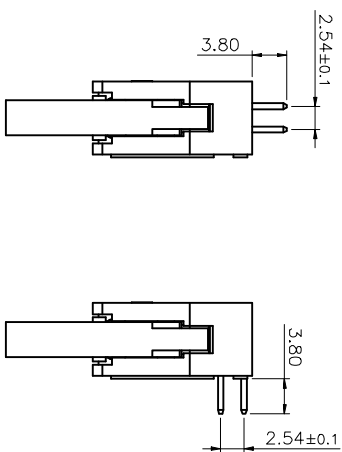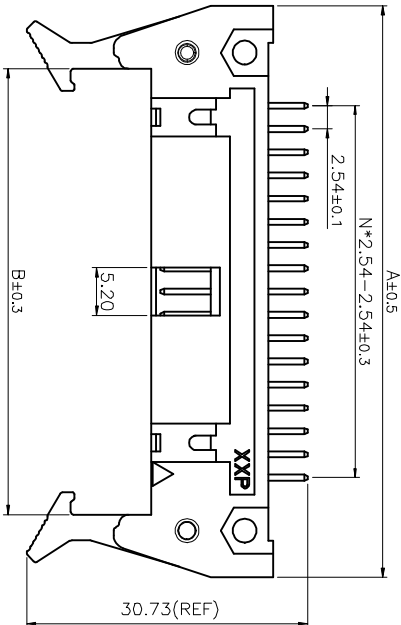

No.of Contacts	10	14	16	20	26	30	34	40	50	60	64
A	31.92	37.00	39.54	44.62	52.24	57.32	62.40	70.02	82.72	95.42	100.50
B	18.22	23.30	25.84	30.92	38.54	43.62	48.70	56.32	69.02	81.72	86.80



RECOMMEND PCB LAYOUT(TOLERANCE=±0.05)

GENERAL TOLERANCE	ANGLE	TOLERANCE	PROJECTION	TITLE
X, ±0.60	X, ±5°	mm	SHROUDED HEADER PITCH 2.54mm	LL1030-2B
.X, ±0.38	.X, ±3'	A4		
.XX, ±0.25	.XX, ±2	SERIES		

慈溪蓝翎电子有限公司  
CIXI LANLING ELECTRONICS CO., LTD.