


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	ZQJ 11/18/2014	~	ZQJ 11/18/2014
B	ADD P/N CODE	CJJ 11/18/2014	~	

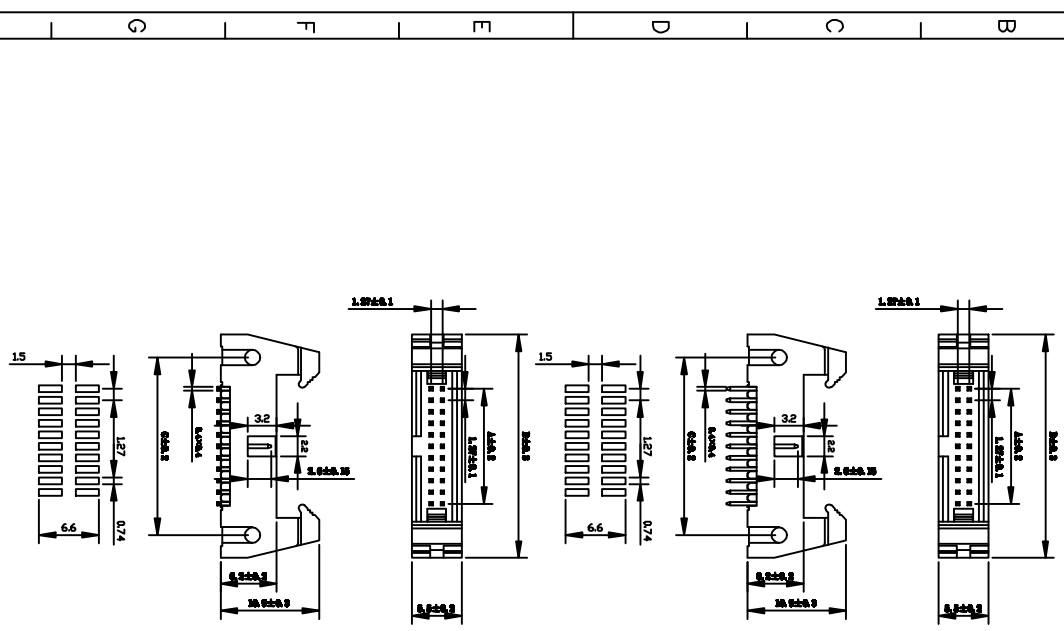

GENERAL TOLERANCE	ANGLE TOLERANCE	TOLERANCE
X: ±0.60	X: ±5°	
X: ±0.38	X: ±3°	
XX: ±0.25	XX: ±2°	

DRAWING TYPE	CUSTOMER
X:	X:
XX:	XX:

SCALE	SHEET
1:1	1 OF 1

DRAWING NO.	SHEET	
	1	OF 1

PROJECTION		TITLE 1.27MM SHROUNDED HEADER STRAIGHT/RIGHT ANGLE/SMT											
UNITS		mm											
SHEET SIZE		A4											
SERIES		LL1030-4											

Position	06	08	10	14	16	18	20
A	2.54	3.81	5.08	7.62	8.89	10.16	11.43
B	18.31	19.58	20.85	23.39	24.66	25.93	27.20
C	12.81	14.08	15.35	17.89	19.61	20.43	21.70

Position	26	30	34	40	50	60	68
A	15.24	17.78	20.32	24.13	30.48	36.83	41.91
B	31.01	33.55	36.09	39.90	46.25	52.60	57.68
C	25.51	28.05	30.59	34.40	40.75	47.10	52.18

材质Material
 绝缘体Insulator: Polyester UL 94V-0 Standard; Nylon 6I
 接触件Contacts: Brass B65
 电镀层Plating: Gold plated, 1u" overfor "Nickel
 电气性能Electrical
 接触电阻Contact Resistance: 30m Ohm; at 1 AMP DC
 绝缘电阻Insulator Resistance: 1000M Ohm; at 500V DC
 耐压Withstanding Voltage: 1000V AC/rms 60Hz for 1 min
 工作电流Current Rating: 1 AMP
 工作电压Voltage Rating: 250V AC/rms 60Hz
 使用温度范围Operating Temp: -40°C~+105°C

慈溪蓝翎电子有限公司
 CIXI LANLING ELECTRONICS CO., LTD.