



REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	ZQJ 11/18/2014	~	ZQJ 11/18/2014
B	ADD P/N CODE	CJJ 11/18/2014	~	

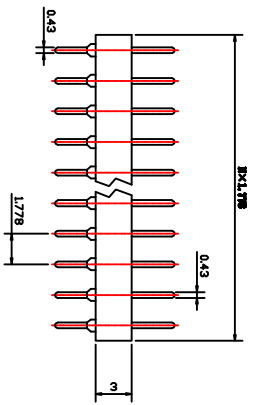

Technical Data
 Insulator:Black glass
 filled polyester
 Flammability:UL 94V-0
 Sleeve:Brass CuZn36Pb3
 Current
 rating:3amps/contact max
 Contact resistance:max
 10MΩ
 Dielectric strength:min
 1000VRMS
 Plating:Gold plated/Tin
 plated
 Operating
 temperature:-55℃~+105℃
 Soldering
 temperature:+245℃±
 5℃, 5s max

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	
X	±0.60	X	±5°	⊕	mm	⊕	DIP STRIP ADAPTER
X	±0.38	X	±3°	▽	mm	▽	PITCH 1.778mm
.XX	±0.25	.XX	±2°				PITCH 1.778mm
.XX		.XX					LL1020-8
DRAWING TYPE CUSTOMER				SHEET			
SCALE 1:1				SHEET 10F1			
DRAWING NO.				DRAWING NO.			

慈溪蓝翎电子有限公司
 CIXI LANLING ELECTRONICS CO., LTD.
 Tel: 86-574-63519036 Fax: 86-574-63517070