


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	ZQJ 11/18/2014	~	ZQJ 11/18/2014
B		CJJ 11/18/2014	~	

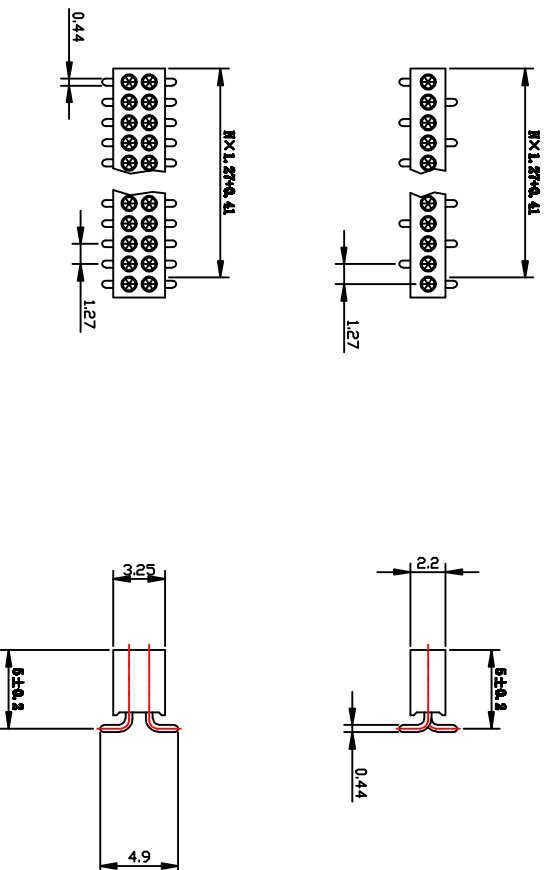

Technical Data
 Insulator:Black glass filled polyester
 Flameability:UL 94V-0
 Sleeve:Brass QZ368768
 Contacts Clip(finger):Beryllium copper
 Mating pin:Φ0.35 to 0.50mm
 Porous: (polished steel gauge Φ0.41)
 Mechanical life:min 500 cycles
 Current rating:3Amps/contact max
 Contact resistance:max 10MΩ
 Dielectric strength:min 1000V/MS
 Plating:Gold plated/Tin plated
 Operating temperature:-55°C~+105°C
 Soldering temperature:+245°C ± 5°C, 5s
 max

GENERAL TOLERANCE		ANGLE TOLERANCE	
X, .X	±0.60	X, .X	±5°
.XX	±0.38	.XX	±3°
	±0.25		±2°
DRAWING TYPE CUSTOMER			
SCALE	1:1	SHEET	10F-1
DRAWING NO.		DRAWING NO.	

PROJECTION	TITLE
UNITS	SIPIC SOCKET S.M.T
SHEET SIZE	PITCH 1.27mm
A4	LL1019-13
SERIES	

慈溪蓝翎电子有限公司
 CIXI LANLING ELECTRONICS CO., LTD.
 Tel: 86-574-63619035 Fax: 86-574-63617070