
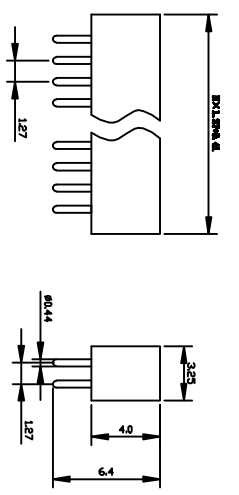


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	ZQJ 11/18/2014	~	ZQJ 11/18/2014
B	ADD P/N CODE	CJJ 11/18/2014	~	

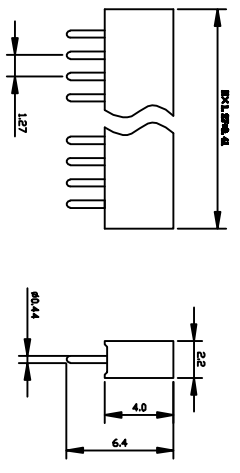

Technical Sata

Insulator:Black glass filled polyester PPS-GR30-FR
 Flammability:UL 94V-0
 Sleeve:Brass CuZn36pb3
 Contact clip(4 finger):Beryllium copper
 Mating pin:Φ0.35toΦ0.5mm
 Forces:(polished steel gaugeΦ0.41)
 Mechanical life:min 500 cycles
 Current rating:3Amps/Contact max
 Contact resistance:max 10mΩ
 Dielectric strength:min 1000VRMS

GENERAL TOLERANCE	ANGLE	TOLERANCE	PROJECTION	TITLE
X, ±0.60	X, ±5°	⊕	mm	1.27MM SIP IC SOCKET ST
.X, ±0.38	.X, ±3°	∇	A4	SERIES LL1019-12
.XX, ±0.25	.XX, ±2°			
DRAWING TYPE	CUSTOMER	SHEET	1 OF 1	
SCALE	1:1			
DRAWING NO.				

LANLING
 慈溪蓝翎电子有限公司
 CIXI LANLING ELECTRONICS CO., LTD.