
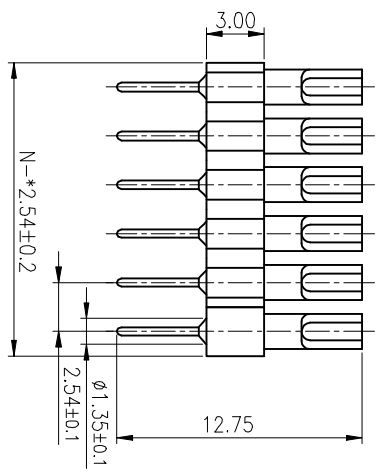


REV	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	ZQJ 11/18/2014		
B	ADD P/N CODE	CJJ 11/18/2014		

NOTES:

- ELECTRICAL CHARACTERISTICS:
 - CONTACT RESISTANCE: 20mΩ Max.
 - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC(rms) FOR 1 MINUTE.
 - INSULATION RESISTANCE: 1000MΩ Min.
- ENVIRONMENT CHARACTERISTICS:
 - TEMPERATURE: 0°C~+85°C.
- PRODUCT NUMBER CODE:

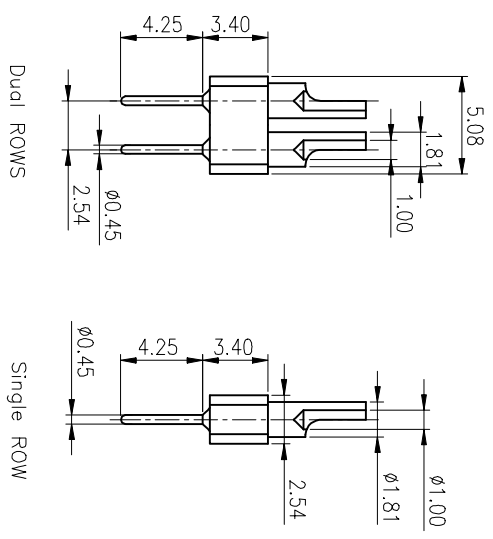

- LL1020-3 - X X X
- HOUSING COLOR
- B: Black
- CONTACT PLATING
- 1: Tin 150u"
- 2: Tin 200u"
- 3: G/F
- 4: Gold 3u"
- 5: Gold 10u"
- 6: Gold 15u"
- No. OF CONTACTS
- 1*1 - 1*40
- 2*1 - 2*40
- SERIES No.
- LL1020-3

GENERAL TOLERANCE	ANGLE TOLERANCE
X ±0.60	X ±5°
X ±0.38	X ±3°
.XX ±0.25	.XX ±2°

DRAWING TYPE	CUSTOMER
SCALE	1:1
DRAWING NO.	SHEET
	10F1

PROJECTION	TITLE
UNITS	PCB HEADER STRIPS PITCH 2.54mm
SHEET SIZE	SOLDER TYPE
A4	LL1020-3

慈溪蓝翎电子有限公司
CIXI LANLING ELECTRONICS CO., LTD.