


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	ZQJ 11/18/2014		
B	ADD P/N CODES	CJJ 11/18/2014		

NOTES:

- ELECTRICAL CHARACTERISTICS:
 - CONTACT RESISTANCE: 20mΩ Max.
 - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC(rms) FOR 1 MINUTE.
 - INSULATION RESISTANCE: 1000MΩ Min.
- ENVIRONMENT CHARACTERISTICS:
 - TEMPERATURE: -40°C~+105°C.
- PRODUCT NUMBER CODE:

LL1020-7 - X X X X X

 - Housing color
 - Black
 - Contact plating
 - 1: Tin 150u"
 - 2: Tin 200u"
 - 3: G/F
 - 4: Gold 3u"
 - 5: Gold 10u"
 - 6: Gold 15u"

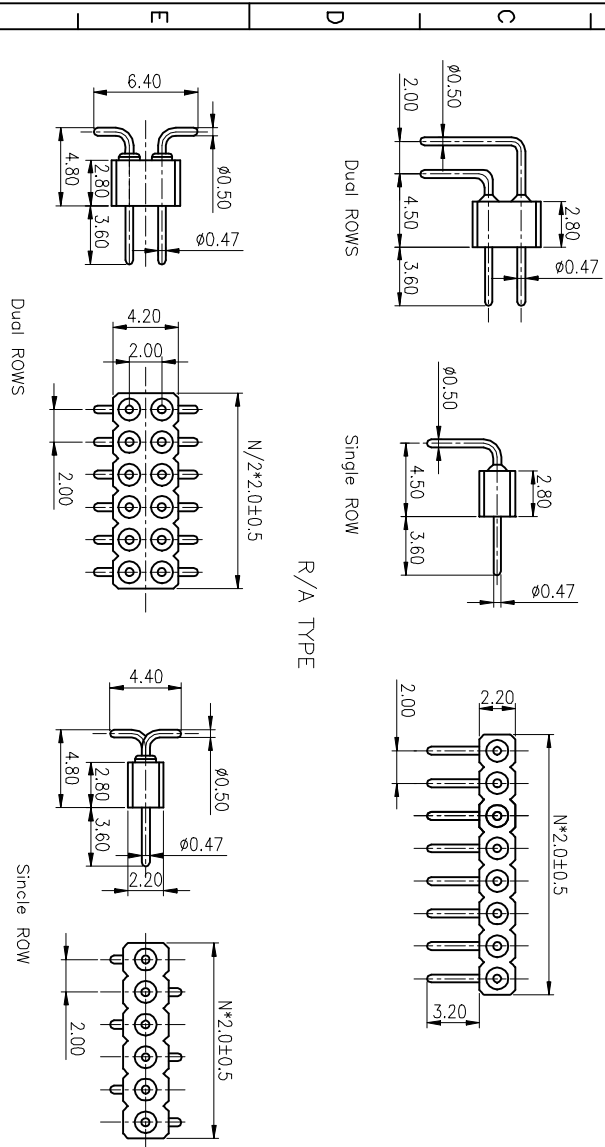

SMT TYPE

Single ROW

SERIES No.
LL1020-7

No. OF CONTACTS
1*1 - 1*40
2*1 - 2*40

Mounting type:
V: V/T TYPE
R: R/A TYPE
S: SMT TYPE

GENERAL TOLERANCE		ANGLE TOLERANCE	
X	±0.60	X	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°

DRAWING TYPE	CUSTOMER	SHEET	10F1
SCALE	1:1		
DRAWING NO.			

PROJECTION	TITLE
UNITS	mm
SHEET SIZE	A4
SERIES	LL1020-7

DIP & SMT STRIPS ADAPTOR PITCH 2.00mm

慈溪蓝翎电子有限公司
CIXI LANLING ELECTRONICS CO., LTD.

1 2 3 4 5 6 7 8

A B C D E F G H