



REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	ZQJ 11/18/2014	~	ZQJ 11/18/2014
B	ADD P/N CODE	CJJ 11/18/2014	~	

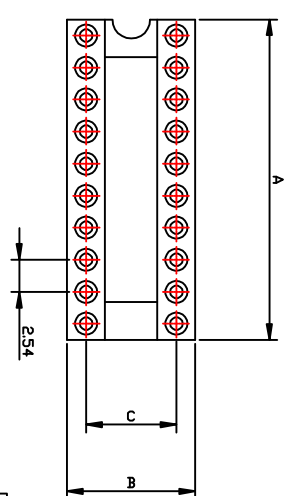

Pin	Length	Pin	Length
6	8.25mm	6	8.25mm
7	7.62mm	7	7.62mm
8	8.25mm	8	8.25mm
9	8.25mm	9	8.25mm
10	11.25mm	10	8.25mm
11	11.25mm	11	8.25mm
12	14.25mm	12	11.25mm
13	14.25mm	13	11.25mm
14	15.25mm	14	12.25mm
15	15.25mm	15	12.25mm

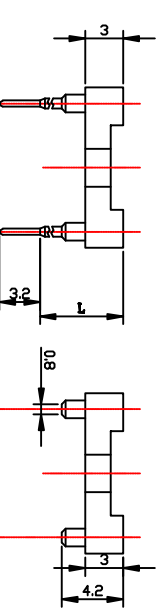

Position	A	B	C
6P	7.6	10.16	7.62
8P	10.16	10.16	7.62
10P	12.6	10.16	7.62
12P	15.2	10.16	7.62
14P	17.78	10.16	7.62
16P	20.32	10.16	7.62
18P	22.86	10.16	7.62
20P	25.4	10.16	7.62
24P N	30.48	10.16	7.62
28P N	35.56	10.16	7.62
24P V	30.48	17.78	15.24
28P V	35.56	17.78	15.24
32P	40.64	17.78	15.24
40P	50.8	17.78	15.24
42P	53.34	17.78	15.24
48P	60.96	17.78	15.24
50P	63.5	17.78	15.24

Technical Data
 Insulator:Black glass filled polyester
 Flammability:UL 94V-0
 Sleeve:Brass CuZn36Pb8
 Contacts Clip(4finger) :Beryllium copper
 Mating pin:Φ0.40 to 0.56mm
 Forces: (polished steel gauge Φ0.43)
 Mechanical life:min 500 cycles
 Current rating:3amps/contact max
 Contact resistance:max 10MΩ
 Dielectric strength:min 1000VRMS
 Plating:Gold plated/Tin plated
 Operating temperature:-55℃~+105℃
 Soldering temperature:+245℃±5℃, 5s max

GENERAL TOLERANCE		ANGLE TOLERANCE	
X	±0.60	X	±5°
.X	±0.38	.X	±5°
.XX	±0.25	.XX	±2°

DRAWING TYPE	CUSTOMER	SHEET	10F1
SCALE	1:1		
DRAWING NO.			

PROJECTION		TITLE	
UNITS	mm	DIP IC SOCKET PITCH 2.54mm	
SHEET SIZE	A4	PIN LENGTH 8.25 11.25 12.6 14.25 15.25	
		LL1021-3	

慈溪蓝翎电子有限公司
 CIXI LANLING ELECTRONICS CO., LTD.
 Tel: 86-574-88519386 Fax: 86-574-88517070