REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	ZQJ 11/18/2014		ZQJ 11/18/2014
B		CJJ 11/18/2014		ZQJ 11/18/2014
C		CJJ 11/18/2014		

[FEMALE]

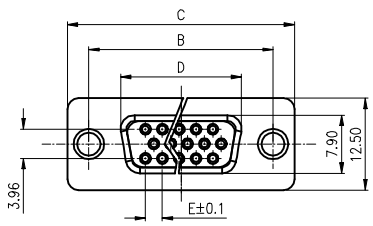

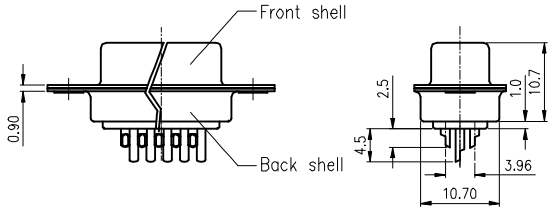



Standard TYPE

[MALE]

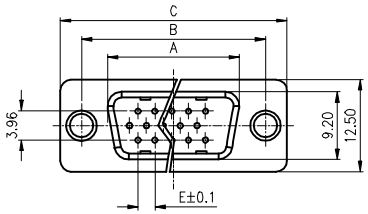



CC TYPE

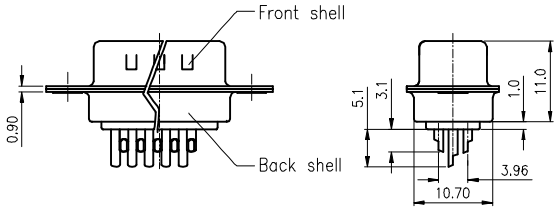



CS TYPE

NOTES:

1. ELECTRICAL CHARACTERISTICS:
   1.1 CONTACT RESISTANCE: 20mΩ Max. INITIAL.
   1.2 DIELECTRIC WITHSTANDING VOLTAGE: 500V AC(rms) FOR 1 MINUTE.
   1.3 INSULATION RESISTANCE: 1000MΩ Min.
2. ENVIRONMENT CHARACTERISTICS:
   TEMPERATURE RANGE: −40°C~+105°C.
3. PART NUMBER: DS1035
4. PRODUCT NUMBER CODE:

LL1045-2- X X X X X X X

- SCREW DIM. A
  - S: Standard(W/O nut)
  - 1: 3.00
  - 2: 4.00
  - 3: 4.50
  - 4: 5.00
  - 5: 5.50
  - 6: 5.80
- SCREW TYPE
  - S: Standard(W/O nut)
  - 1: CC TYPE
  - 2: CS TYPE
- CONTACT PLATING
  - 8: FULL GOLD FLASH
  - Si: SELECTIVE GOLD FLASH
- SHELL PLATING
  - T: FORNT & BACK SHELL TIN
  - N: FORNT SHELL NICKEL,BACK SHELL TIN
- HOUSING COLOR
  - B: BLACK
  - W: WHITE
  - U: BLUE
- CONNECTOR TYPE
  - M: MALE
  - F: FEMALE
- No.OF CONTACTS
  - 15: 15pos.
  - 26: 26pos.
  - 44: 44pos.
  - 62: 62pos.

Dimension

Position	A±0.2	B±0.2	C±0.3	D	E
15	17.90	24.99	30.80	16.33	2.29
26	26.50	33.32	39.14	24.66	2.29
44	40.00	47.04	53.04	38.38	2.29
62	56.50	63.50	69.32	54.84	2.14
78	54.30	61.00	67.04	52.34	2.14

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°

DRAWING TYPE	CUSTOMER		
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.			

PROJECTION		TITLE	D-SUB H.D SOLDER TYPE
UNITS	mm		
SHEET SIZE	A4	SERIES	LL1045-2

慈溪蓝翎电子有限公司
CIXI LANLING ELECTRONICS CO.,LTD.