
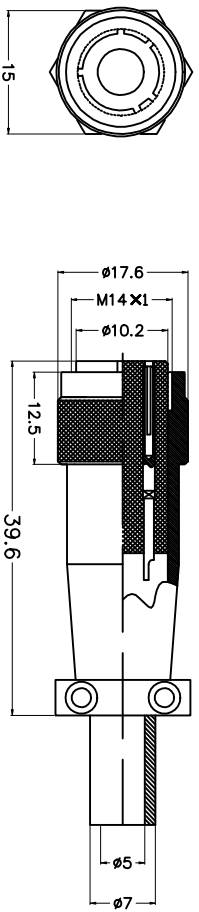


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	ZQJ 11/18/2015	~	ZQJ 11/18/2015
B	ADD P/N CODE	CJJ 11/18/2015	~	CJJ 11/18/2015

PLS12 系列 2T-8T

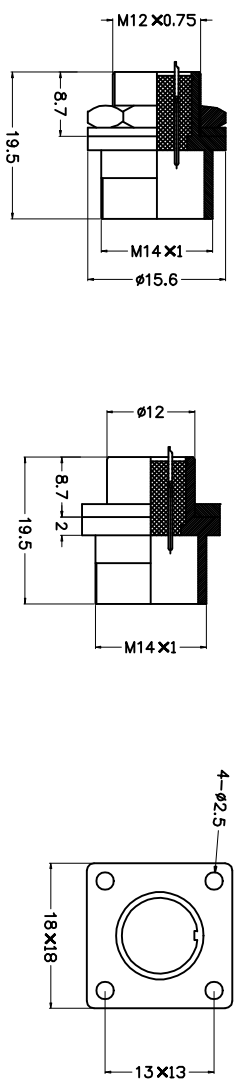

系列/型號 Shell code	PLS12-2	PLS12-3	PLS12-3	PLS12-4	PLS12-5	PLS12-6	PLS12-7	PLS12-8
殼體規格, 插針規格 Shell Dimension and Pin Specification	插針 2 Pin 2	插針 3 Pin 3	插針 3 Pin 3	插針 4 Pin 4	插針 5 Pin 5	插針 6 Pin 6	插針 7 Pin 7	插針 8 Pin 8
電氣規格 Electrical Specification	DC-150V	DC-150V	DC-150V	DC-150V	DC-150V	DC-150V	DC-150V	DC-150V
工作電壓 (DC V) Operating Voltage (DC V)	200	200	200	200	200	200	200	200
額定電流 (DC mA) Rated Current (DC mA)	1000	1000	1000	1000	1000	1000	1000	1000
插針間距 (mm) Pin Pitch (mm)	1000	1000	1000	1000	1000	1000	1000	1000
插針長度 (mm) Pin Length (mm)	10	10	10	10	10	10	10	10
插針直徑 (mm) Pin Diameter (mm)	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
插針長度公差 (mm) Pin Length Tolerance (mm)	±0.1	±0.1	±0.1	±0.1	±0.1	±0.1	±0.1	±0.1
插針直徑公差 (mm) Pin Diameter Tolerance (mm)	±0.02	±0.02	±0.02	±0.02	±0.02	±0.02	±0.02	±0.02

GENERAL TOLERANCE	ANGLE TOLERANCE
X, ±0.60	X, ±5°
.X, ±0.38	.X, ±3°
.XX, ±0.25	.XX, ±2°

PROJECTION	TITLE
UNITS: mm	PLS12 Micro Jack Connector
SHEET SIZE: A4	SERIES: PLS12

ITEM	PART NAME	DRAWING NO.	SHEET	1 OF 1
2	CONTACT			
1	HOUSING			


**慈溪蓝翎电子有限公司**  
 CIXI LANLING ELECTRONICS CO., LTD.