



| REV. | DESCRIPTION  | DRAWN          | CHECKED | APPROVED       |
|------|--------------|----------------|---------|----------------|
| A    | NEW RELEASE  | ZQJ 11/18/2014 | ~       | ZQJ 11/18/2014 |
| B    | ADD P/N CODE | CJJ 11/18/2014 | ~       |                |

**Material\*\***

Housing: 30KGlass filled PBT UL94V-0.  
 Contacts: Phosphor Bronze.

**Electrical Characteristics:**

Current Rating: 5AMP.  
 Insulator Resistance: 5000M  $\Omega$  min. at DC 500V.  
 Contact Resistance: 20m  $\Omega$  max. at DC 100mA.  
 Operating Temperature: -55°C~+105°C.

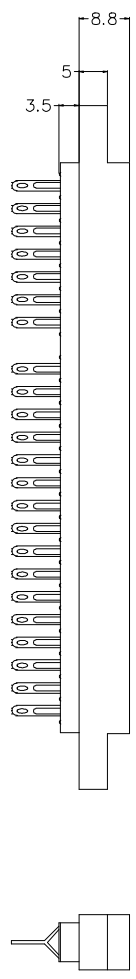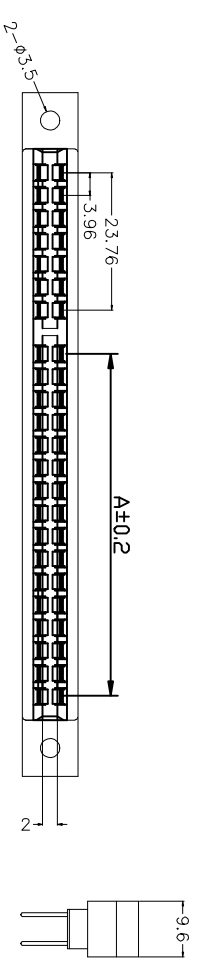

| Position | Dimension A |
|----------|-------------|
| 14       | 23.76       |
| 22       | 39.6        |
| 30       | 27.72       |
| 36       | 39.6        |
| 44       | 55.44       |

| GENERAL TOLERANCE |       | ANGLE TOLERANCE |     | PROJECTION | TITLE                            |
|-------------------|-------|-----------------|-----|------------|----------------------------------|
| X                 | ±0.60 | X               | ±5° | UNITS      | EDGE CARD CONNECTOR PITCH 3.96mm |
| X                 | ±0.38 | X               | ±3° | SHEET SIZE | A4                               |
| .XX               | ±0.25 | .XX             | ±2° |            | SERIES LLL1004                   |

| ITEM | PART NAME | PART NO. | MATERIALS     | FINISHED           | DRAWING NO. |
|------|-----------|----------|---------------|--------------------|-------------|
| 2    | CONTACT   |          | COPPER ALLOY  | GOLD OR TIN PLATED |             |
| 1    | HOUSING   |          | THERMOPLASTIC | UL 94 V-0          |             |

**慈溪蓝翎电子有限公司**  
 CIXI LANLING ELECTRONICS CO., LTD.