

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	ZQJ 11/18/2014	~	ZQJ 11/18/2014
B	ADD P/N CODE	CJJ 11/18/2014	~	

Material**

Housing: 30%glass filled PBT UL94V-0.

Contacts: Phosphor Bronze.



Electrical Characteristics:

Current Rating: 5AMP.

Insulator Resistance: 5000M Ω min. at DC 500V.

Contact Resistance: 20m Ω max. at DC 100mA.

Operating Temperature: -55°C~+105°C.

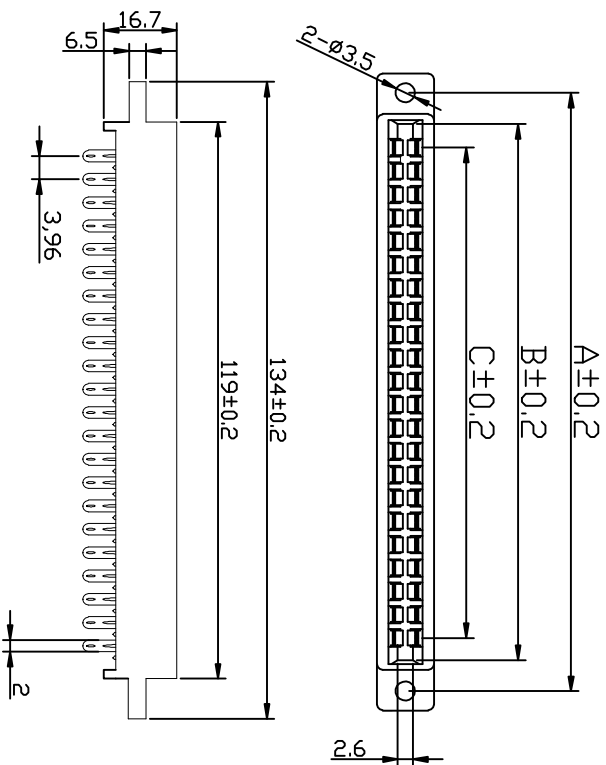

GENERAL TOLERANCE	ANGLE TOLERANCE	PROJECTION UNITS	TITLE
X, ±0.60	X, ±5°	mm	EDGE CARD CONNECTOR PITCH 3.96mm
.X, ±0.38	X, ±3°	A4	SERIES LL1006-3 56pin
.XX, ±0.25	.XX, ±2°		

ITEM	PART NAME	PART NO.	MATERIALS	FINISHED	DRAWING TYPE	DRAWING NO.	CUSTOMER	SHEET	1 OF 1
1	HOUSING		THERMOPLASTIC		SCALE				
2	CONTACT		COPPER ALLOY		DRAWING TYPE				
			GOLD GR TIN PLATED		SCALE				
			UL 94 V-0		DRAWING NO.				

慈溪蓝翎电子有限公司
CIXI LANLING ELECTRONICS CO., LTD.