

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	ZQJ 11/18/2014	~	ZQJ 11/18/2014
B	ADD P/N CODE	CJJ 11/18/2014	~	

**Material 1**

Housing: 30%Glass filled PBT UL94V-0.

Contacts: Phosphor Bronze.



**Electrical Characteristics:**

Current Rating: 5AMP.

Insulator Resistance: 5000M Ohm. at DC 500V.

Contact Resistance: 20m Ohm max. at DC 100mA.

Operating Temperature: -55°C~+105°C.

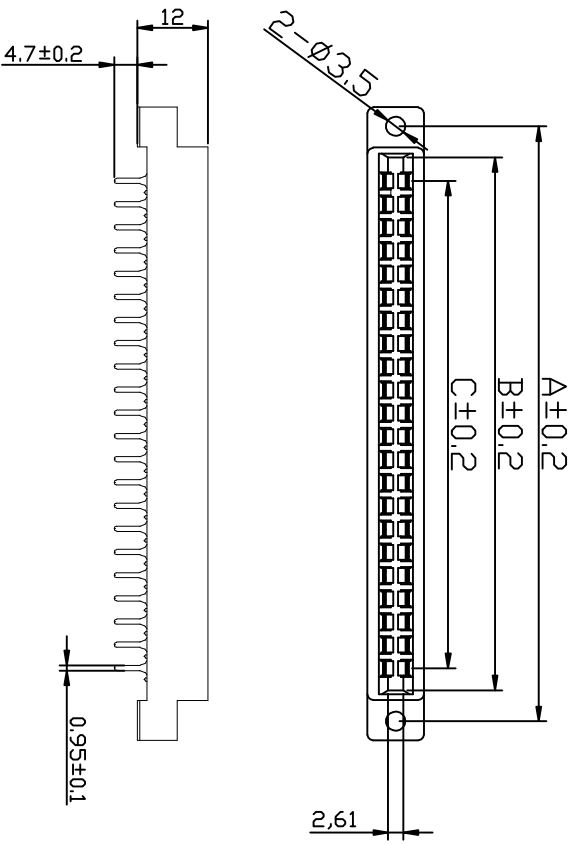

Position	A	B	C
8	30.34	20.18	11.88
12	38.26	28.1	19.8
16	46.18	36.02	27.72
20	54.1	43.94	35.64
24	62.02	51.86	43.56
30	73.9	63.74	55.44
36	85.78	75.62	67.32
44	101.62	91.46	83.16
56	125.38	115.22	106.92
72	157.06	146.9	138.6

GENERAL TOLERANCE	ANGLE TOLERANCE
X, ±0.60	X, ±5°
.X, ±0.38	.X, ±3°
.XX, ±0.25	.XX, ±2°

PROJECTION	TITLE
UNITS mm	EDGE CARD CONNECTOR PITCH 3.96mm
SHEET SIZE A4	SERIES LL1006-2

ITEM	PART NAME	PART NO.	MATERIALS	FINISHED	DRAWING NO.
2	CONTACT		COPPER ALLOY	GOLD OR TIN PLATED	
1	HOUSING		THERMOPLASTIC	UL 94 V-0	

**慈溪蓝翎电子有限公司**  
CIXI LANLING ELECTRONICS CO., LTD.