


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	ZQJ 11/18/2014	~	ZQJ 11/18/2014
B	ADD P/N CODE	CJJ 11/18/2014	~	

Material:

Housing: 30%Glass filled PBT UL94V-0.
 Contacts: Phosphor Bronze.

Electrical Characteristics:

Current Rating: 5AMP.
 Insulator Resistance: 5000M Ω min. at DC 500V.
 Contact Resistance: 20m Ω max. at DC 100mA.
 Operating Temperature: -55 $^{\circ}$ C~+105 $^{\circ}$ C.

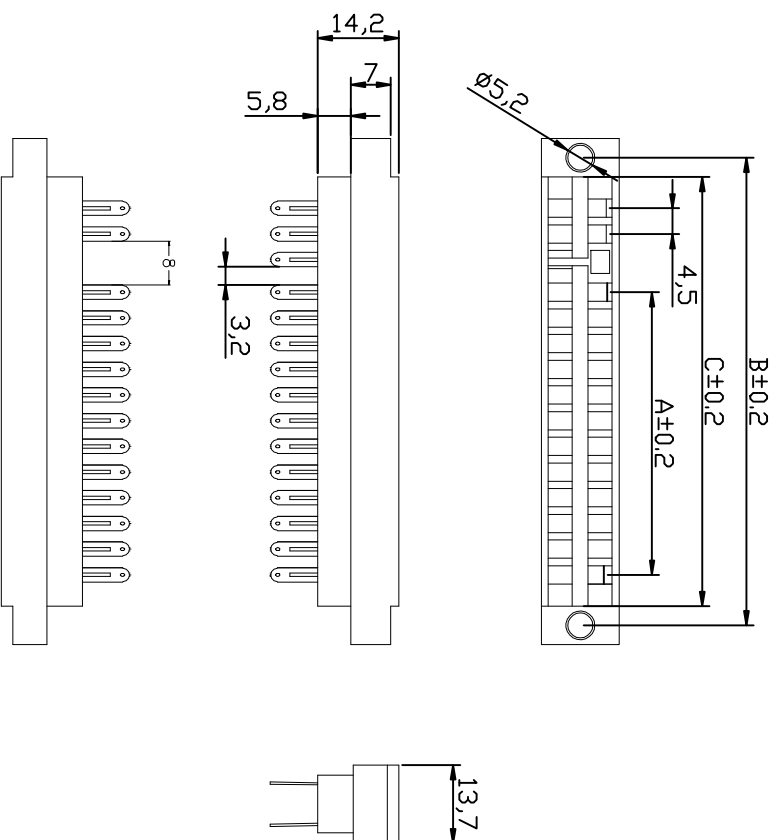

Position	A	B	C
20	27	59.2	50.3
30	49.5	81.7	72.7

GENERAL TOLERANCE	ANGLE TOLERANCE
X, ±0.60	X, ±5°
X, ±0.38	X, ±3°
XX, ±0.25	XX, ±2°

PROJECTION UNITS	TITLE	EDGE CARD CONNECTOR PITCH 4.5mm
SHEET SIZE	A4	SERIES L11005

ITEM	PART NAME	PART NO.	MATERIALS	FINISHED	DRAWING TYPE	CUSTOMER	SCALE	DRAWING NO.
2	CONTACT		COPPER ALLOY	GOLD OR TIN PLATED				
1	HOUSING		THERMOPLASTIC	UL 94 V-0				

慈溪蓝翎电子有限公司
 CIXI LANLING ELECTRONICS CO., LTD.