


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	ZQJ 11/18/2015	~	ZQJ 11/18/2015
B	ADD P/N CODE	CJJ 11/18/2015	~	CJJ 11/18/2015

材质 Material **SLOT-2.54-180度**

绝缘体 Insulator	Glass Filled PBT UL94V-0 Black
接触件 Contacts	Brass/Phosphor Bronze
电镀层 Plating	Contact Gold and Dip Tin over Nickel

电气性能 Electrical Characteristics

接触电阻 Contact Resistance	30mΩ max at 100mA
绝缘电阻 Insulator Resistance	1000KΩ min at 500V DC
耐压 Withstanding Voltage	1000V AC/rms 50Hz for 1 min
工作电流 Current Rating	3 AMP
使用温度范围 Operating Temp	-55℃~+105℃

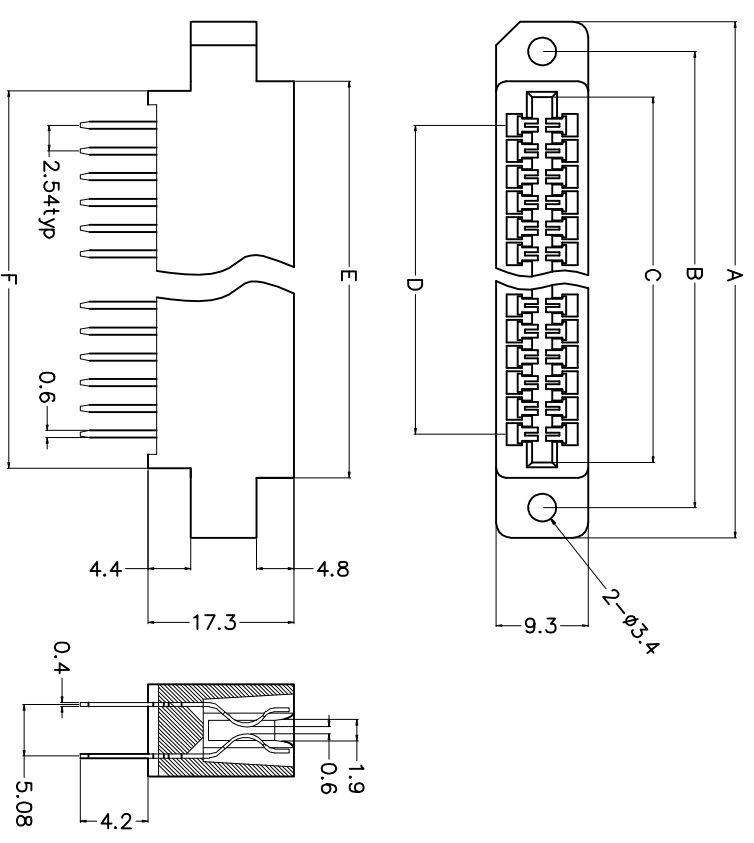

Dimension

Position	A	B	C	D	E	F
24	51.24	44.74	33.34	27.94	36.74	34.24
44	76.64	70.14	58.74	53.34	62.14	59.64
48	81.72	75.22	63.82	58.42	67.22	64.72
56	91.88	85.38	73.98	68.58	77.38	74.88
60	96.96	90.46	79.06	73.66	82.46	79.96
72	112.20	105.70	94.30	88.90	97.70	95.20
86	129.98	123.48	112.08	106.68	115.48	112.98
100	147.76	141.26	129.86	124.46	133.26	130.76

GENERAL TOLERANCE	X, ±0.60 X, ±0.38 .XX, ±0.25	ANGLE TOLERANCE	X, ±5° X, ±3° .XX, ±2°
DRAWING TYPE	1:1	CUSTOMER	
SCALE		SHEET	1 OF 1
DRAWING NO.	4		

PROJECTION	UNIT	TITLE
SHEET SIZE	A4	SERIES
		LL1038-2

慈溪蓝翎电子有限公司
CIXI LANLING ELECTRONICS CO., LTD.

LANLING 蓝翎电子

2	CONTACT
1	HOUSING
ITEM	PART NAME