
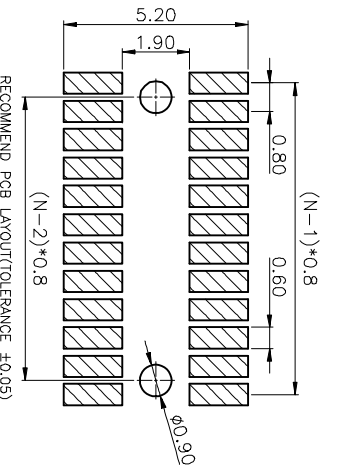


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	ZQJ 11/18/2014	~	ZQJ 11/18/2014
B	ADD P/N CODE	CJJ 11/18/2014	~	

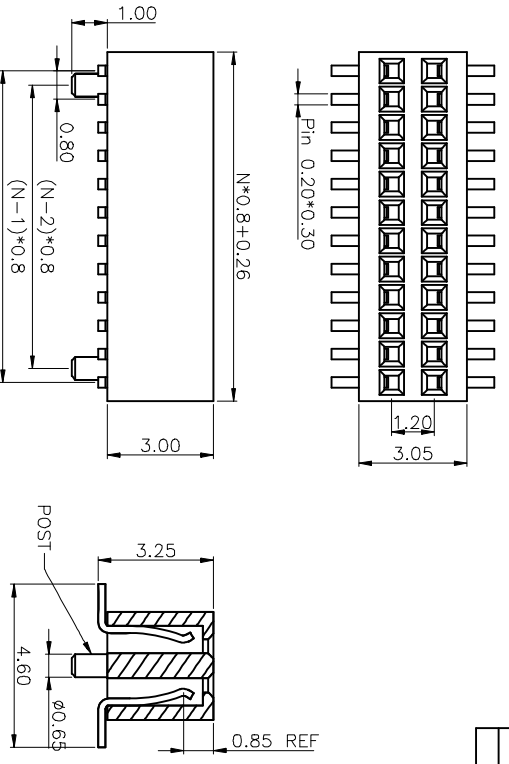

- NOTES:
- SPECIFICATIONS
 - Current Rating: 0.5A
 - Insulation Resistance: 100MΩ Min
 - Dielectric Withstanding: 300V AC
 - Contact Resistance: 20mΩ Max
 - Operating Temperature: -40°C to +105°C
 - MATERIALS:
 - Housing: Thermoplastic(U194 V-0)
 - Contact: Copper alloy

GENERAL TOLERANCE	ANGLE TOLERANCE	TOLERANCE
X: ±0.60	X: ±5°	±S
.X: ±0.38	X: ±3°	±S'
.XX: ±0.25	.XX: ±2°	±Z'

DRAWING TYPE	CUSTOMER
SCALE	1:1
DRAWING NO.	SHEET 1 OF 1

PROJECTION	TITLE
UNITS mm	0.8mm FEMALE HEADER
SHEET SIZE A4	SMT TYPE
	SERIES LL1018-7

慈溪蓝翎电子有限公司
CIXI LANLING ELECTRONICS CO., LTD.