
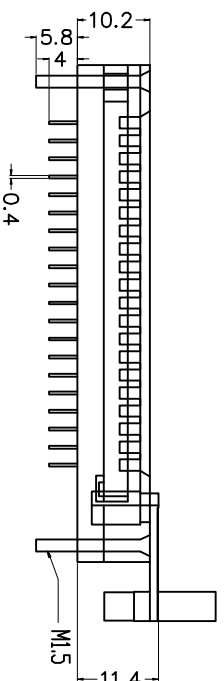


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	ZQJ 11/18/2015	~	ZQJ 11/18/2015
B	ADD P/N CODE	CJJ 11/18/2015	~	CJJ 11/18/2015

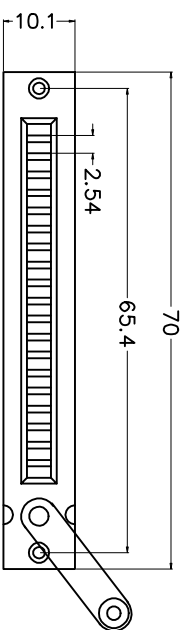

Position	A	B	C
2#	61.2	61.7	62.26
1#	62.9	63.6	64.6
1#	64.3	64.94	65.2
0#	66.6	67.4	68.3

GENERAL TOLERANCE		ANGLE TOLERANCE	
X, ±0.60	X, ±5°	X, ±3°	X, ±2°
.XX, ±0.38	.XX, ±3°	.XX, ±3°	.XX, ±2°
.XX, ±0.25	.XX, ±2°	.XX, ±2°	.XX, ±2°
DRAWING TYPE CUSTOMER		DRAWING NO.	
SCALE	1:1	SHEET	1 OF 1

PROJECTION	TITLE
UNITS	2.54MM SINGLE ROW ZIF SOCKET CONNECTOR
SHEET SIZE	SERIES
A4	LL1003-3



**慈溪蓝翎电子有限公司**  
CIXI LANLING ELECTRONICS CO., LTD.

### 材质

外壳: 填充30%玻璃纤维增强PP, 耐火等级UL94  
触点: 磷青铜  
镀层: 镀金 50微米厚的镍上镀20微米厚的金  
镀锡 50微米厚的锡上镀100微米厚的锡

### 电特性

额定电流: 1AMP, 1安培  
绝缘电阻: 在500V直流下, 最小5000兆欧姆  
接触电阻: 在100mA下, 最大20毫欧姆  
使用温度: -55°C~+105°C

### 特点

用于交流开关 (DTPs) 带有70英寸引线空间  
杠杆驱动的零插入力结构  
插座容易拆卸, 方便维修  
插座触点位于插座顶部以下90英寸处

2	CONTACT
1	HOUSING
ITEM	PART NAME