
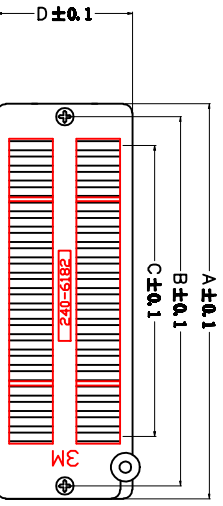


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	ZQJ 11/18/2014	~	ZQJ 11/18/2014
B		CJJ 11/18/2014	~	ZQJ 11/18/2014
C		CJJ 11/18/2014	~	

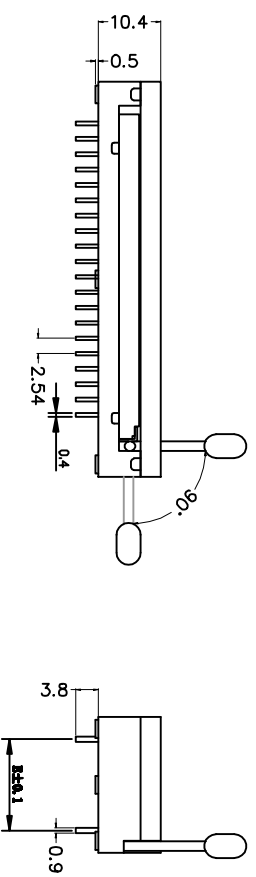

Material:
Housing: 30% Glass filled PBT UL94-0.
Contacts: Phosphor Bronze.
Plating: Gold plated; 3u" over; 50u" nickel.
Tin plated; 100u over; 50u" nickel.
Electrical Characteristics:
Current Rating: 1 AMP.
Insulator Resistance: 5000M Ω min at DC 500V
Contact Resistance: 20m Ω max at DC 100mA
Operating Temperature: -55 $^{\circ}$ -+105 $^{\circ}$.
Features:
For DIPs with 100 $^{\circ}$ lead spacing
Lever actuated zero insertion force mechanism
Socket easily disassembles for reparability.
Socket contact plating of 110 below top surface of socket.

Position	A	B	C	D	E
24P	45	41	27.94	22.6	15.24
28P	50	46	33.02	22.6	15.24
32P	56.3	52.3	38.1	22.6	15.24
40P	65.2	61.2	48.26	22.6	15.24
48P	75.6	71.6	58.42	22.6	15.24

GENERAL TOLERANCE	ANGLE TOLERANCE	PROJECTION	TITLE
X, ± 0.60	X, $\pm 5^{\circ}$	UNITS	2.54MM ZIF SOCKET MATRD
X, ± 0.38	X, $\pm 3^{\circ}$	mm	BY 7, 62/15, 24MM PILE
.XX, ± 0.25	.XX, $\pm 2^{\circ}$	SHEET SIZE	A4
		SHEET	1 OF 1
DRAWING TYPE: CUSTOMER	SCALE: 1:1	DRAWING NO.	4

慈溪蓝翎电子有限公司
CIXI LANLING ELECTRONICS CO., LTD.
Tel: 86-574-85619098 Fax: 86-574-85619770