
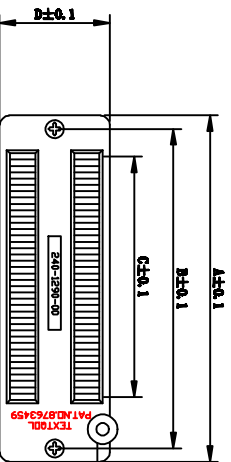


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	ZQJ 11/18/2014	~	ZQJ 11/18/2014
B		CJJ 11/18/2014	~	ZQJ 11/18/2014
C		CJJ 11/18/2014	~	

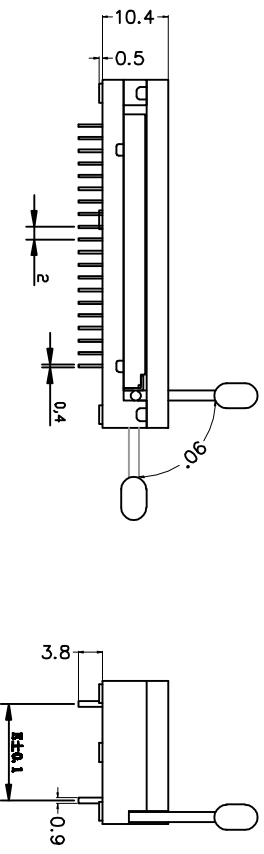

Position	A	B	C	D	E
28P	42.5	38.5	26	17.5	10.16
40P	54.8	50.8	38	17.5	10.16

**Material:**  
Housing: 30% Glass filled PBT UL94-0.  
Contacts: Phosphor Bronze.  
Plating: Gold plated: 3u" over 50u" nickel.  
Tin plated: 100u" over 50u" nickel.

**Electrical Characteristics:**  
Current Rating: 1 AMP.  
Insulator Resistance: 5000M $\Omega$  min at DC 500V  
Contact Resistance: 20m $\Omega$  max at DC 100mA  
Operating Temperature: -55 $^{\circ}$ —+105 $^{\circ}$ .

**Features:**  
For DIPs with 100 $^{\circ}$  lead spacing  
Lever actuated zero insertion force mechanism  
Socket easily disassembles for reparability.  
Socket contact pitch of .110 below top surface of socket.

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	
X, .X	$\pm 0.60$	X, .X	$\pm 5^{\circ}$	UNITS	mm	<b>ZIF SOCKET</b>	
.XX	$\pm 0.38$	.XX	$\pm 3^{\circ}$	SHEET SIZE	A4	<b>PITCH 2.0mm</b>	
	$\pm 0.25$		$\pm 2^{\circ}$			LL1003-2	
DRAWING TYPE CUSTOMER		SCALE		SHEET		SERIES	
1:1		1 OF 1		7		LL1003-2	
DRAWING NO.		4		5		6	

**慈溪蓝翎电子有限公司**  
**CIXI LANLING ELECTRONICS CO., LTD.**  
Tel: 86-574-63619038 Fax: 86-574-63617070