

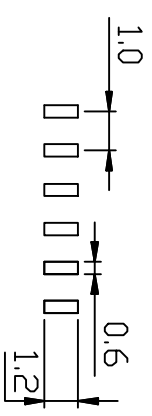
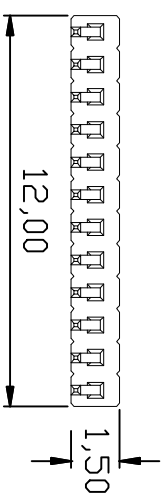
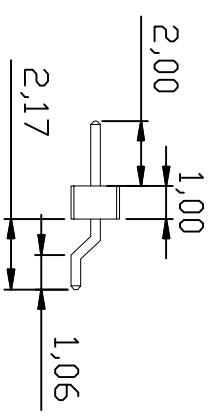


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	ZQJ 11/18/2015	~	ZQJ 11/18/2015
B	ADD P/N CODE	CJJ 11/18/2015	~	CJJ 11/18/2015

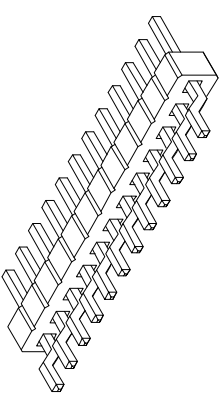

PCB LAYOUT

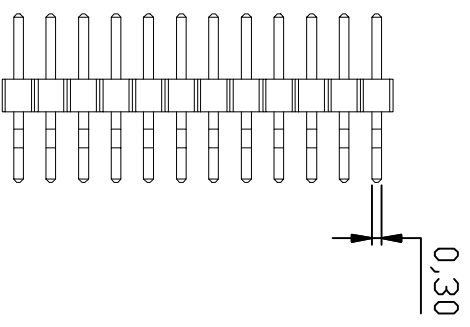

SPECIFICATIONS

Current Rating: 0.75Amps  
 Insulator Resistance: 5000Megohms min.  
 Dielectric Withstanding: AC 500v  
 Operating Temperature: -40°~+105°C  
 Contact Material: Phospor Brooze  
 Max Processing Temp: 230° for 30 seconds  
 Insulator Material: NYLON-6T  
 Finish: Gold flash

UNSPECIFIED TOLERANCE: ±0.20

GENERAL TOLERANCE		ANGLE TOLERANCE	
X	±0.60	X	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°

DRAWING TYPE		CUSTOMER	
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.			

ITEM	PART NAME	DRAWING NO.	SCALE	SHEET	1 OF 1
1	CONTACT				
2	HOUSING				

PROJECTION UNITS: mm  
 SHEET SIZE: A4  
 SERIES: LL103-04J  
 TITLE: 2.54MM 1\*NI P 板插排针

慈溪蓝翎电子有限公司  
 CIXI LANLING ELECTRONICS CO., LTD.